



# OSCAR

## Slide Gate

Compatible with

**DELTA and ECHO**



### Description

The OSCAR slide gate is the ideal solution for locations where a swing gate is not practical. The gate integrates seamlessly with our modular systems ECHO and DELTA, available in 3 and 4 beam configurations with a height of 1200 mm. It can also be installed as a standalone unit.

Designed for efficient access control, the OSCAR is perfect for securing storage areas, driveways, and any entry points where space constraints or high traffic volumes make a swing gate impractical. Its user-friendly handles ensure effortless operation and secure access.

### Technical Information

Operational Temperature Range:	-40°C up to +50°C / -40°F up to +112°F
Ignition Temperature:	350-360°C / 662 - 680°F
Flash Point:	350-360°C / 662 - 680°F
Toxicity:	Nontoxic
Chemical Resistance:	High-ISO / TR 10358
UV Stability	Gray scale: 5/5
Changes to material after 5 years:	Blue Wool scale: 8/8 Tensile strength: No changes
Static Rating (surface resistivity):	1015-1016 Ω
Standard Warranty:	5 Years
Deflection zone:	250mm / 9,84in

### Scan or click to review




Maintenance Guide  
Assembly Guide  
Videos  
Tender Text  
Warranty



d-flexx

## Specifications

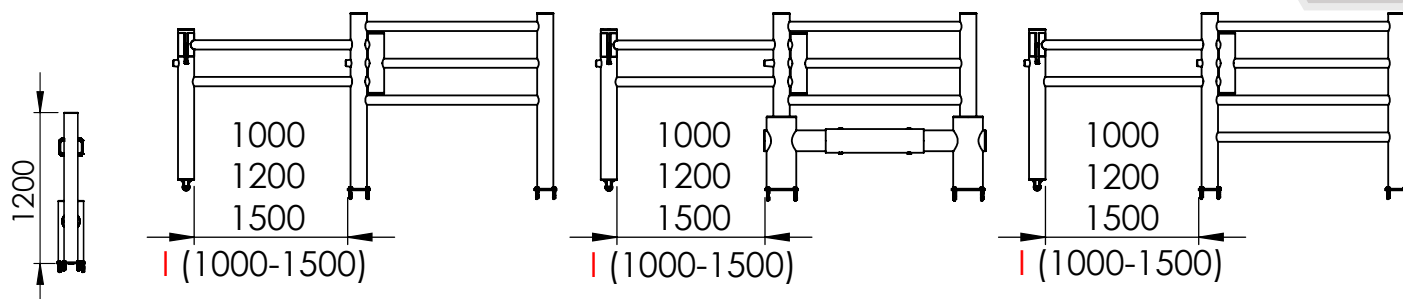

## Measurements mm vs in

	mm	in
Height	1200	47,24
Width 1	1000	39,37
Width 2	1200	47,24
Width 3	1500	59,06
Width 4	1000-1500	39,37-59,06

## Max. force to bolt 21 kN

